



# Biomass unit

## HOTBIO MBC 200

Artikelnr.: HM2000000263



### Your advantages

- High output up to 200 kW
- CO<sub>2</sub>-neutral generation of energy
- Including supply of pellets

The mobile biomass containers are used where bigger outputs are required. For example with contracting systems or local heat supply.

With our biomass containers up to 200 kW, all system

components required for self-sufficient operation are, as always, integrated in the container. This makes heating with biomass very flexible and environment-friendly.


## Technical specifications / Accessories

Type	HOTBIO MBC 200
Weight	approx. 8,500 kg (without pellets/water)
Power connection	230 V / 16 A
Medium	hot water 90° / 70°C
Safety pressure	heating 3 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	4.5 m³/h : 6-7 mWS
Hot water output 60°C	(45°C) 2,200 l/h
Circulation	yes
Capacity of internal heating oil tank	8.5 m³ (6.500 kg) pellets
Frost protection	yes
Remote- / tank monitoring	optional
Flue system	stainless steel stack
Connection	on site: IF/OF - 2"




Areas of application:

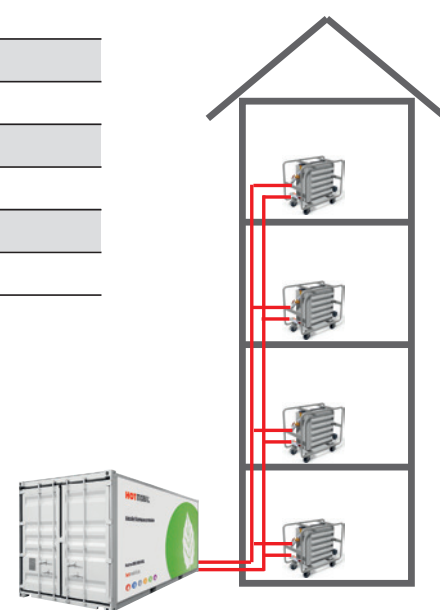

Subject to technical changes - only for information



### Accessories

	Item number
 <b>HOTAIR MLE 20</b> Transportable air heaters up to 20 kW	HM2000000238
 <b>HOTFLOW MST 270</b> Mobile heat exchanger 270 kW	HM2000000242
 <b>FUEL MANAGEMENT</b> We take care of: delivery and collection of the appropriate tank size, arrangement of filling, cleaning and emptying by a specialist company	HM2000001306