



Heating container

HOTMASTER MHC 1.000

Artikelnr.: HM2000000206



Your advantages

- Compact lightweight construction
- Connection via mobile connection lines
- Self-sufficient operation
- Including heating oil tank

Maximum output. For district heat, industry, building, or process heat.

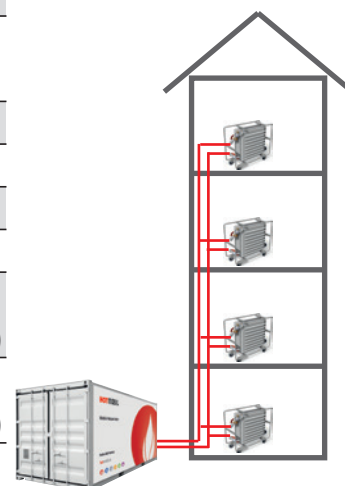
A benefit of the modular design is that several units can be connected. In this output range the equip-

ment can be customised to meet your requirements. Upon request we can provide additional tanks or mobile heat exchangers.




Technical specifications / Accessories

Type	HOTMASTER MHC 1.000
Heat output	560 - 1.000 kW
Dimensions (L x W x H)	(20' Container) 6,058 x 2,438 x 2,591 mm
Weight	approx. 7,500 kg
Power connection	400 V / 16 / 32 A
Fuel	heating oil EL (or natural gas)
Medium	hot water 90° / 70°C
Safety pressure	heating 6 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	51,7 m³/h : 20,2 mWs
Circulation	no
Capacity of internal heating oil tank	4,000 Litres (subject to availability / external optional always possible)
Frost protection	yes
Remote- / tank monitoring	optional
Flue system	stainless steel stack
Connection	on site: IF/OF - 3"
NATURAL GAS connection	DN80 PN16 50 mbar (operation only possible after consultation regarding the connection dimension)
LIQUID GAS connection	DN80 PN16 50 mbar (operation only possible after consultation regarding the connection dimension)

Areas of application:



Subject to technical changes - only for information

Accessories	Item number
 <p>HOTTANK MHT 5.000 – 25.000 Mobile expansion tank up to 25,000 litres</p>	HM2000000252
 <p>FUEL MANAGEMENT We take care of: delivery and collection of the appropriate tank size, arrangement of filling, cleaning and emptying by a specialist company</p>	HM2000001306
 <p>HOTVIEW With digital remote monitoring, you can easily keep an eye on the operating data of your energy system at any time and from anywhere</p>	HM2000005126