



# Heating container

## HOTMASTER MHC 1.500

ArtikelNr.: HM2000000207



### Your advantages

- Compact lightweight construction
- Connection via mobile connection lines
- Self-sufficient operation
- Including heating oil tank

Maximum output. For district heat, industry, building, or process heat.

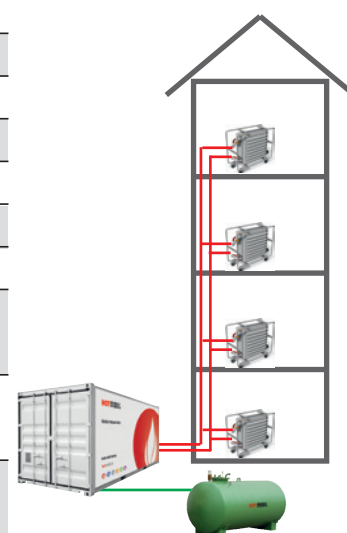
A benefit of the modular design is that several units can be connected. In this output range the equip-

ment can be customised to meet your requirements. Upon request we can provide additional tanks or mobile heat exchangers.




# Technical specifications / Accessories

Type	HOTMASTER MHC 1.500
Heat output	1,100 - 1,500 kW
Dimensions (L x W x H)	(20' Container) 6,058 x 2,438 x 2,591 mm
Weight	approx. 10,000 kg
Power connection	400 V / 63 A
Fuel	heating oil EL (or natural gas)
Medium	hot water 90° / 70°C
Safety pressure	heating 6 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	65 m³/h : 27 mWS
Circulation	no
Frost protection	yes
Remote- / tank monitoring	optional
Intake / performance	18 A   11 kW
Flue system	stainless steel stack
Connection	on site: 2 x 3" IF / 2 x 3" OF
NATURAL GAS connection	DN80 IG   50 mbar (operation only possible after consultation regarding the connection dimension)
LIQUID GAS connection	DN80 IG   50 mbar (operation only possible after consultation regarding the connection dimension)
Optional	External tank system from 5,000 to 25,000 liters (see accessories)

Areas of application:



Subject to technical changes - only for information

Accessories	Item number
 <b>HOTVIEW</b> With digital remote monitoring, you can easily keep an eye on the operating data of your energy system at any time and from anywhere	HM2000005126
 <b>HOTFLOW MST 1.500 - plus</b> Mobile system separator up to 1,500 kW	HM2000000244
 <b>HOTTANK MHT 5.000 – 25.000</b> Mobile expansion tank up to 25,000 litres	HM2000000252