



Heating container

HOTMASTER MHC 2.500

Artikelnr.: HM2000000208



Your advantages

- Compact lightweight construction
- Connection via mobile connection lines
- Self-sufficient operation
- Including heating oil tank

Maximum output. For district heat, industry, building, or process heat

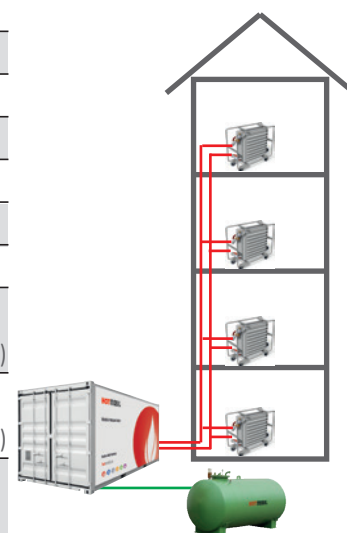
A benefit of the modular design is that several units can be connected. In this output range the equip-

ment can be customised to meet your requirements. Upon request we can provide additional tanks or mobile heat exchangers.




Technical specifications / Accessories

Type	HOTMASTER MHC 2.500
Heat output	1,500 - 2,500 kW
Dimensions (L x W x H)	(20' Container) 6,058 x 2,438 x 2,591 mm
Weight	approx. 10,000 kg
Power connection	400 V 63 A
Fuel	heating oil EL (or natural gas)
Medium	hot water 90° / 70°C
Safety pressure	heating 6 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	107 m ³ /h : 27 mWS
Circulation	no
Frost protection	yes
Remote- / tank monitoring	optional
Intake / performance	45 A / 25 kW
Flue system	stainless steel stack
Connection	per 2 x 3" IF / per 2 x 3" OF
NATURAL GAS connection	DN125/PN16 flange 50 mbar (operation only possible after consultation regarding the connection dimension)
LIQUID GAS connection	DN125/PN16 flange 50 mbar (operation only possible after consultation regarding the connection dimension)
Optional	External tank system from 5,000 to 25,000 liters (see accessories)

Areas of application:



Subject to technical changes - only for information

Accessories	Item number
 HOTSILENCE MSD Silencer	HM2000000262
 HOTTANK MHT 5.000 – 25.000 Mobile expansion tank up to 25,000 litres	HM2000000252
 FUEL MANAGEMENT We take care of: delivery and collection of the appropriate tank size, arrangement of filling, cleaning and emptying by a specialist company	HM2000001306