



# Heating container

## HOTMASTER MHC 550

ArtikelNr.: HM2000000214



### Your advantages

- Compact lightweight construction
- Connection via mobile connection lines
- Self-sufficient operation
- Including heating oil tank

Maximum performance. For district heating, industry, commercial construction or process heat. Thanks to the simple modular design, several plants can be connected together. The equipment in this

performance size can be adapted to your special needs. Additional tanks or mobile heat exchangers can be supplied on request.


# Technical specifications / Accessories

Areas of application:



Type HOTMASTER MHC 550	Heating oil EL 10' (Natural gas/Liquid gas)	Heating oil/Natural gas (Liquid gas) 20'
Heat output	280 – 550 kW	360 – 550 kW
Dimensions (L x W x H)	2,991 x 2,438 x 2,591 mm	6,058 x 2,438 x 2,591 mm
Weight	approx. 4,500 kg	approx. 7,000 kg
Fuel	Heating oil EL (natural-/liquid gas optional)	Heating oil/Natural gas (liquid gas)
Capacity of internal heating oil tank	optional	integrated 4,000 Litres
Delivery data of main pump	24 m³/h : 10 mWS	32 m³/h : 11.1 mWS
Safety pressure	heating 3 bar	heating 3 / 6 bar
Connection	on site: IF/OF - 3"	
Medium	hot water 90° / 70°C	
Safety technology	according DIN EN 12828	
Frost protection	yes	
Remote- / tank monitoring	optional	
Power connection	400 V / 16 A	
Flue system	stainless steel stack	
NATURAL GAS connection	DN40 IG   50 mbar (operation only possible after consultation regarding the connection dimension)	
LIQUID GAS connection	DN40 IG   50 mbar (operation only possible after consultation regarding the connection dimension)	

Subject to technical changes - only for information

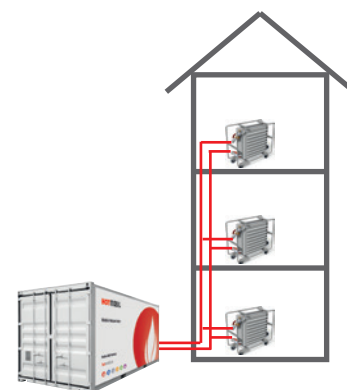

## Accessories



**HOTFLOW MST 270**  
Mobile heat exchanger 270 kW

## Item number

HM2000000242



**HOTWATER MFS 350**  
Mobile fresh water station up to 350 kW

HM2000008278