



# Heating unit

## HOTMOBIL MHZ 100

Artikelnr.: HM2000000655



### Your advantages

- Mobile Unit
- Special boilers for increased requirements
- Optimum operation via side panel
- Including heating oil tank

The mobile heating unit contains all the components necessary for operation. Thanks to its small dimensions, it can be placed directly where it is needed. Operation is conveniently carried out at standing height via the side flaps. The mobile heating unit is


particularly suitable as an emergency heating system or construction heating system, for bridging the heating system in the event of a heating failure or for drying screeds. Corresponding standard programs are available, but individual settings are also possible.

# Technical specifications / Accessories

Type	HOTMOBIL MHZ 100
Heat output	80 - 110 kW
Dimensions (L x W x H)	ca. 3,440 x 1,525 x 2,060 mm (incl.tow bar, without flue system)
Weight	ca. 990 kg (without heating oil/water)
Power connection	230 V / 50 Hz / 1 ~, CEE 16 A
Fuel	heating oil EL
Medium	hot water 90° / 70°C
Safety pressure	heating 3 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	ca. 10,5 m³/h, max. 12 mWS
Circulation	no
Capacity of internal heating oil tank	920 litres
Frost protection	yes
Remote- / tank monitoring	optional
Intake / performance	12.5 A / 2.5 kW
Flue system	stainless steel stack
Connection	Connection on site: IF/OF - 2"

Subject to technical changes - only for information

Areas of application:

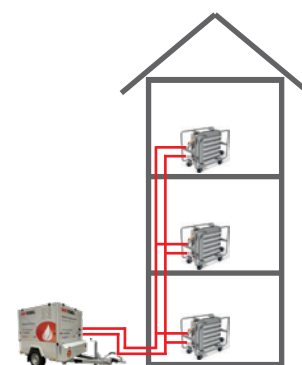

## Accessories

	<b>HOTAIR MLE 20</b> Transportable air heaters up to 20 kW	HM2000000238
	<b>HOTWATER MFS 150 (Optional)</b> Transportable fresh water station up to 150 kW for producing domestic hot water	HM2000001305
	<b>HOTTANK MHT 3.000</b> Mobile expansion tank up to 3,000 litres	HM2000005053