



Heating unit

HOTMOBIL MHZ 200 FG

Artikelnr.: HM2000008246



Your advantages

- First mobile plant with integrated liquefied gas supply system
- Higher efficiency due to use of calorific value
- Flexible application possibilities
- Connection via mobile connection lines
- Optional remote monitoring by HOTVIEW

Mobile heating unit with an output of 200 kW and integrated liquid gas supply system.

Equipped with a gas condensing heating system with modulating burners, circulation pumps, pressure maintenance and LPG tank, this design produces

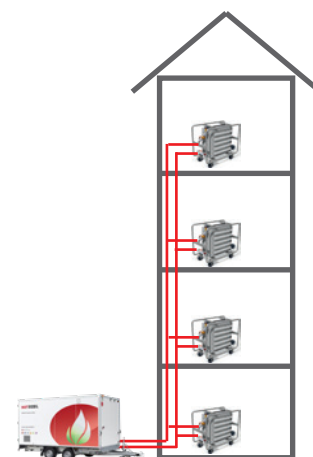
lower air pollutant emissions compared to heating oil and is space-saving compared to conventional system constellations, as there is no need for an adjacent LPG tank.

Technical specifications / Accessories




Type	HOTMOBIL MHZ 200 FG
Heat output	14 - 200kW at 50°C/30°C heating water 13 - 180kW at 80°C/60°C heating water
Dimensions (L x W x H)	ca. 6,285 x 2,380 x 3,120 mm (incl.tow bar, without flue system)
Weight	ca. 2,800 kg (without fluid gas / water)
Power connection	1~ 230V / 16A CEE 3pol
Fuel	liquid gas P
Medium	hot water 50° / 30° C (80° / 60° C)
Safety pressure	3 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	16 m³/h : 9.19 mWS
Circulation	no
Capacity of internal heating oil tank	2,700 litres (2,300 litres usable)
Frost protection	yes
Remote- / tank monitoring	optional
Intake / performance	9.5 A / 2.1 kW
Connection	Connection on site: IF/OF - 2"

Subject to technical changes - only for information

Areas of application:



Accessories

	Item number
 HOTAIR MLE 50 Transportable air heaters up to 50 kW	HM2000000239
 HOTRAMP MÜR Mobile drive-over ramps made of robust hard rubber	HM2000000289
 HOTFLOW MST 270 Mobile heat exchanger 270 kW	HM2000000242