



# Heating unit

## HOTMOBIL MHZ 350

Artikelnr.: HM2000000201



### Your advantages

- **Mobile unit**
- **Flexible in use**
- **Connection via mobile connecton lines**
- **Including heating oil tank**

The medium range. With an output of 350 kW and their extremely compact design, these units are true all-rounders.

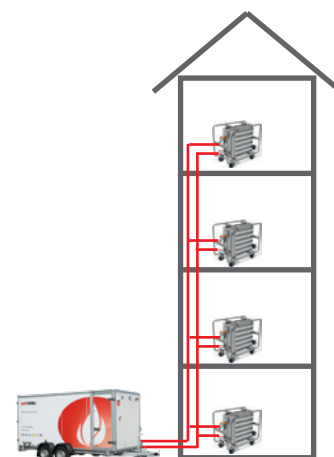
Equipped with heating water generation, integrated circulation pump, expansion vessel an tank system, as

well as IF temperature regulation controlled by atmospheric conditions, this heating unit leaves little to be desired. This model series can also be operated with liquid gas, which considerably reduces CO<sub>2</sub> emissions.




# Technical specifications / Accessories

Type	HOTMOBIL MHZ 350
Heat output	160 - 350 kW
Dimensions (L x W x H)	ca. 6,000 x 2,550 x 2,700 mm (incl.tow bar, without flue system)
Weight	ca. 2,800 kg (without heating oil/water)
Power connection	400 V / CEE 16 A
Fuel	heating oil EL (natural gas/liquid gas optional)
Medium	hot water 90° / 70°C domestic hot water 10° / 60°C (according to availability)
Safety pressure	heating 3 bar domestic hot water 10 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	17 m³/h : 8 mWS
Hot water output 60°C	6,000 l / h
Circulation	no
Capacity of internal heating oil tank	1,500 litres
Frost protection	yes
Remote- / tank monitoring	optional
Intake / performance	7A / 4.3 kW
Flue system	stainless steel stack
Connection	on site: IF/OF - 2", HW/CW - 2", circ. - 1" natural gas: 1"   min. 50 mbar / max. 300 mbar liquid gas: 1"   50 mbar

Areas of application:



Subject to technical changes - only for information

Accessories	Item number
 <b>HOTSILENCE MSD</b> Silencer	HM2000000262
 <b>HOTVIEW</b> With digital remote monitoring, you can easily keep an eye on the operating data of your energy system at any time and from anywhere	HM2000005126
 <b>FUEL MANAGEMENT</b> We take care of: delivery and collection of the appropriate tank size, arrangement of filling, cleaning and emptying by a specialist company	HM2000001306