



Heating unit

HOTMOBIL MHZ 950

Artikelnr.: HM2000000205



Your advantages

- Mobile unit
- Flexible in use
- Connection via mobile connection lines
- Including heating oil tank

High output and yet mobile. The exceptional flexibility of our 950 kW units allows us to be on site in a short space of time, at extremely favourable transport costs.

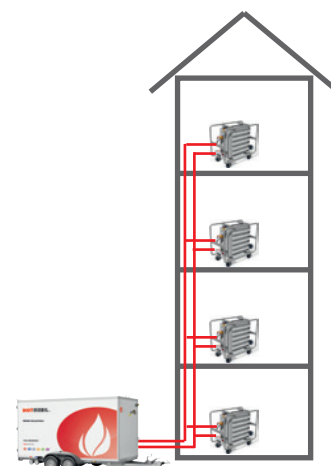
Equipped for generation hot water, including pumps, expansion vessel and integrated tank system for emergency operation. The most cost-efficient solution for hiring large output.




Technical specifications / Accessories

Type	HOTMOBIL MHZ 950
Heat output	560 - 950 kW
Dimensions (L x W x H)	ca. 5,990 x 2,550 x 3,150 mm (incl.tow bar, without flue system)
Weight	ca. 3,500 kg (without heating oil/water)
Power connection	400 V / 32 A
Fuel	heating oil EL (optional natural gas)
Medium	hot water 90° / 70°C
Safety pressure	heating 3 bar / max. 6 bar
Safety technology	according DIN EN 12828
Delivery data of main pump	50 m³/h : 8.5 mWs
Circulation	no
Capacity of internal heating oil tank	1,000 Litres
Frost protection	yes
Remote- / tank monitoring	optional
Intake / performance	15.7A / 9.3 kW
Flue system	stainless steel stack
Connection	on site: IF / QF - 3" natural gas: 2" min. 50 mbar / max. 300 mbar liquid gas: on request

Subject to technical changes - only for information

Areas of application:



Accessories	Item number
 HOTSILENCE MSD Silencer	HM2000000262
 HOTTANK MHT 5.000 – 25.000 Mobile expansion tank up to 25,000 litres	HM2000000252
 FUEL MANAGEMENT We take care of: delivery and collection of the appropriate tank size, arrangement of filling, cleaning and emptying by a specialist company	HM2000001306