


# Mobile accessories | Ventilation unit

## COOLAIR MLG 25

Artikelnr.: HM2000000234

Areas of application:

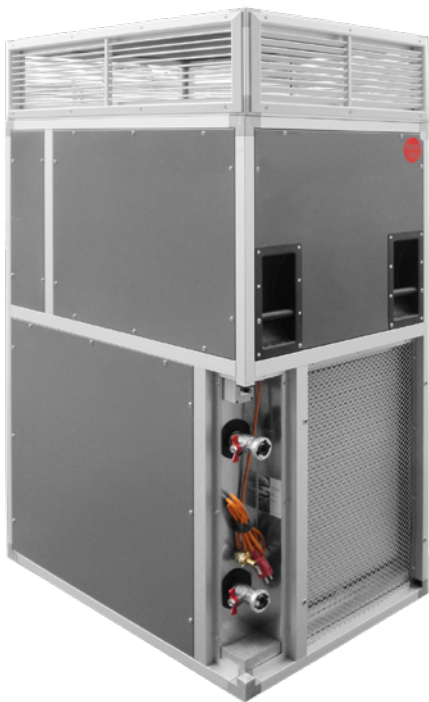

Type	COOLAIR MLG 25
Heat output	approx. 50 kW
Cooling output	Air (32/14°C)/Water (7/12°C): up to 25 kW
Dimensions (L x W x H)	1,000 x 730 x 1,730 mm
Weight	transport weight: 190 kg operating weight: 210 kg
Cooling capacity	up to 2,300 m <sup>3</sup> /h
External pressure	200 Pa
Total pressure	450 Pa
Fan stages	5
Sound pressure level	at unit (outlet port): 83 db (A)
Motor output	1.5 kW
Mains voltage	230 V
Rated current	6.7 A
Electrical connection	Schuko plugs
Connection	Storz D1" (water connections)
Filter class	G4

Subject to technical changes - only for information

### Your advantages

- **5-stage airflow control**
- **Narrow dimensions**
- **Suitable for indoor and outdoor use**
- **High air throughput up to 2,300 m<sup>3</sup> / h**

2,300 m<sup>3</sup>/h Ventilation Unit, can be regulated in five stages with a pressure of up to 200 Pa. Particularly suitable for cooling server rooms, for event air conditioning and machine cooling.

The COOLAIR MLG 25 is portable on castors and fits through any standard door. Air distribution via flexible airhose 1 x 500 mm or free outlet on 4 sides via air head.