


# Mobile accessories | System separator

## HOTFLOW MST 1.500

Artikelnr.: HM2000000244

Areas of application:

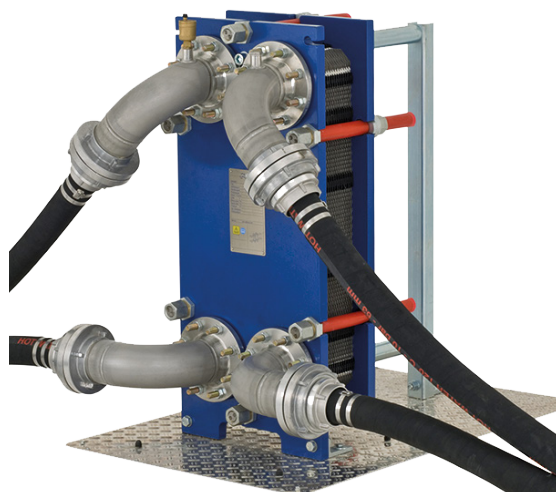

Type	HOTFLOW MST 1.500	
Transmission power	1.500 kW	
	primary	secondary
Infeed temperature	90° C	45° C
Discharge temperature	70° C	60° C
Mass flow	66,800 kg / h	32,400 kg / h
Pressure loss	19,0 kPa	6,1 kPa
Medium	water	
Connection	A-coupling	
Dimensions (L x W x H)	1,200 x 800 x 1,200 mm	
Weight	Tare weight: approx. 410 kg	

Subject to technical changes - only for information

### Your advantages

- Can be used with different media
- No problems at differing pressure conditions
- Suitable for outdoor use

Mobile plate heat exchangers in bolted design for the system separation of two media.

Output approx. 1,000 to 1,500 kW depending on medium and/or temperature conditions. The mobile system separation units are particularly suited for use in the renovation of district heating transfer sta-

tions or failure of process water treatment. In addition, with our HOTFLOW appliances, difficult pressure conditions, for example in high-rise buildings or with lawn heating, can also be overcome. The connection is done as usual via our flexible hose connections HOTFLEX.