


Mobile accessories | System separator

HOTFLOW MST 270

Artikelnr.: HM2000000242

Areas of application:

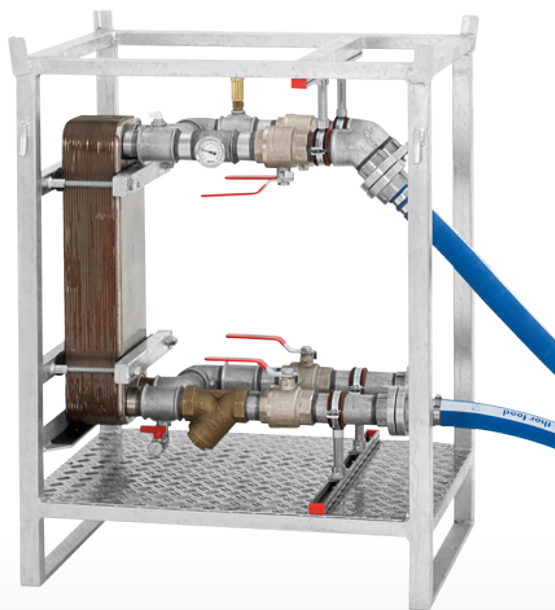

Type	HOTFLOW MST 270	
Transmission power	270 kW	
	primary	secondary
Infeed temperature	80° C	10° C
Discharge temperature	60° C	45° C
Mass flow	11,632 kg/h	6,635 kg/h
Pressure loss	16,0 kPa	7,9 kPa
Medium	water	
Connection	Storz C2"	
Dimensions (L x W x H)	800 x 600 x 1,100 mm	
Weight	Tare weight: approx. 60 kg	

Subject to technical changes - only for information

Your advantages

- Can be used with different media
- No problems at differing pressure conditions
- Suitable for outdoor use

Our mobile heat exchangers are suited for various media and purposes.

Installed in a steel frame and equipped with a tarpaulin cover, they can also be easily installed outdoors. Equipped with fast couplings, locks, dirt traps,

draining and ventilation and thermometers. The heat transmission areas consist of thin, specially embossed stainless steel plates. Two plates form a channel. The media flow through these channels in counterflow manner (primary/secondary).