


Mobile accessories | System separators

HOTFLOW MST 30

ArtikelNr.: HM2000000241

Areas of application:

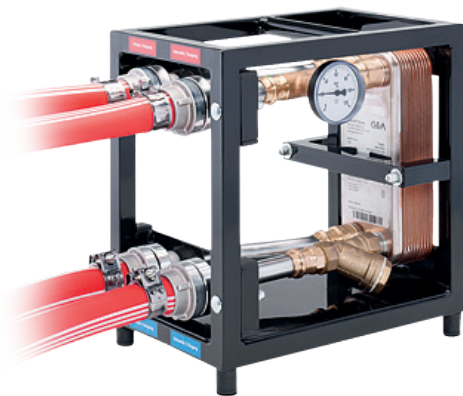

Type	HOTFLOW MST 30	
Transmission power	up to 30 kW	
	primary	secondary
Infeed temperature	85° C	15° C
Discharge temperature	65° C	45° C
Mass flow	1,289 kg / h	863 kg / h
Pressure loss	91.0 kPa	35.0 kPa
Medium	water	
Connection	Storz D1"	
Dimensions (L x W x H)	300 x 200 x 320 mm	
Weight	Tare weight: approx. 6,3 kg	

Subject to technical changes - only for information

Your advantages

- Can be used with different media
- No problems at differing pressure conditions
- Suitable for outdoor use

Our mobile heat exchangers are suited for various media and purposes.

Installed in a steel frame and equipped with a tarpaulin cover, they can also be easily installed outdoors. Equipped with fast couplings, locks, dirt traps, drain-

ing and ventilation and thermometers. The heat transmission areas consist of thin, specially embossed stainless steel plates. Two plates form a channel. The media flow through these channels in counterflow manner (primary/secondary).